



www.mapbatterie.it

BLP 12-60

LITHIUM IRON PHOSPHATE BATTERY

FEATURES

- Lithium Iron Phosphate (LiFePO4): the Safest Lithium Technology.
- Integrated Battery Management System(BMS).
- Bluetooth/RS485/RS232/SMBus/CANBus (Optional). SOC
- LED/LCD Indicator(Optional).

PERFORMANCE

- Long Cycle Life>2000cycles @100% DOD.
- High Density, High Discharge Current, High Temperature Range.
- Low Weight, Free Maintenance. Fast Charging.
- Environment Friendly.



BLP 12-60 (12.8V - 60Ah)

Electrical Parameters

Nominal Voltage	12.8 V
Rated Capacity	60 Ah
Energy	768 Wh
Resistance	≤ 50mΩ
Efficiency	99 %
Cycle Life	>2000cycles @1C,100% DOD
Self Discharge	2% per Month
Max.modules in series/parallel	4S/20P

Mechanical Parameters

Dimension (L x W x H)	260 x 168 x 210 mm
	10.24 x 6.61 x 8.2"
Weight	8,70 kg (19.18 lbs)
Terminal Type	M6 Dx
Battery Housing	ABS, UL-94 V-0
Housing Protection	IP56
Cell Type-Chemistry	LiFePO4 Cylindrical Cell
SOC Display(Optional)	None

Discharge Parameters

Continuous Discharge Current	60 A
Pulse Discharge Current	100 A (< 5 seconds)
Recommended V disconnect	10 V
BMS discharge cut-off voltage	8 V
Reconnect Voltage	9,2 V
Short Circuit Protection	200~600 μs

Charge Parameters

Charge Method	CC-CV
Charge Voltage	14.4 ~ 14.8V
Recommended Float Voltage	13.8 V
Recommended charge current	30 A
Maximum Charge Current	60 A
BMS Charge Cut-off Voltage	15.6 V

Compliance Certificate

Certifications	UL 1642 (Cell)
	CE
	IEC 62133 & CB
	KC
	BIS
Shipping Classification	UN 3480, Class 9, UN 38.3

Temperature Parameters

Discharge Temperature	-20 to 65°C (-4 to 149°F)
Charge Temperature	0 to 50°C (32 to 122°F)
Storage Temperature	-20 to 45°C (- 4 to 113°F)
BMS High Temperature Cut-off	65°C (149°F)






www.mapbatterie.it


BLP 12-60 (12.8V - 60Ah)

Performance Characteristics


CYCLE LIFE vs.DEPTH OF DISCHARGE(DOD)
DISCHARGE@1C, 25 C

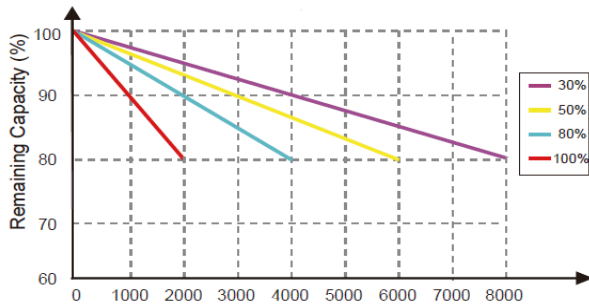


DISCHARGE CAPACITY at VARIOUS TEMPERATURES DISCHARGE
@1C

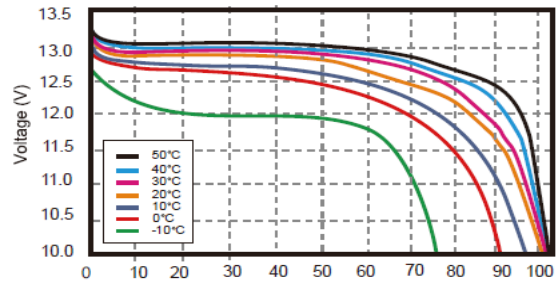


STATE OF CHARGE CURVE @0.5C, 25 C

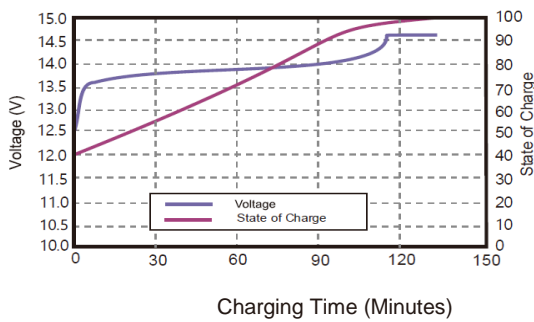

CHARGING CHARACTERISTICS @0.5C, 25 C

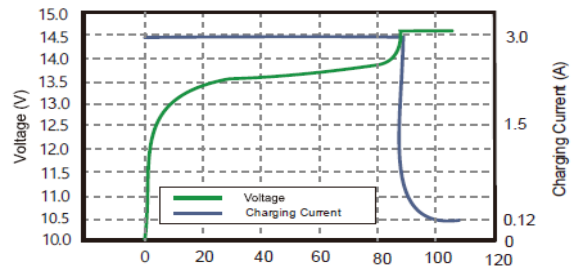


Battery Layout

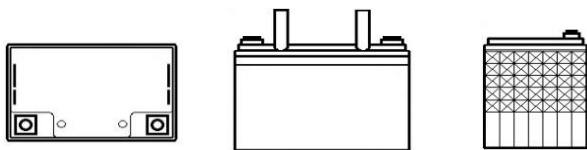

Terminal

M6



Battery Applications

- Data Center UPS
- Telecom Backup Power
- Military Power Supply
- Solar Energy Storage System
- Solar Street LED Lightings
- Golf Trolley & Golf Carts
- Aerial Work Platform
- Floor Cleaning Machines
- Power Tools, Lawn Mower
- Electric Bike & Motorcycles
- Medical Devices
- Electric Ships
- Passenger Vehicles
- Autonomously Guided Vehicles (AGVs)
- Industrial Robotics & Handling Equipment
- Electric Mobilities(E-scooters, Wheelchair)

Battery Recycle



Note: Do Not Mix With Sealed Lead Acid Batteries When Recycling

See MAP User's Manual for Proper Operation.

MAP BATTERIE. All Rights Reserved.